






INSTRUCTION

Pascala I Deckeneinbau-
Downlight





IP20 / IP54 F CE 230-240V~ / 50-60 Hz

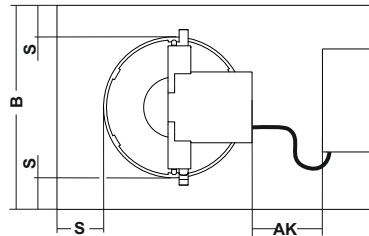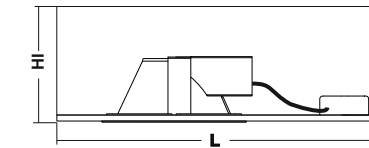

SERIE	D	H	DA
Pascala	241	3	228



SERIE	B	L	HI	AK	S
Pascala Reflektorhöhe 100mm	≥340	≥540	≥160	≥80	≥50
Pascala Reflektorhöhe 160mm	≥340	≥540	≥220	≥80	≥50

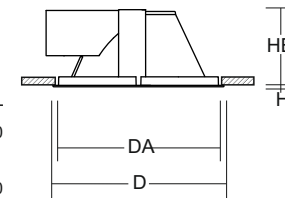

Durchschleifen
looping-in



901206.00X	D 241, H 2, HE 160	-	-	TC-TEL	1 x 14/17W	0,90 Kg
901206.00X.76/.78	D 241, H 2, HE 160	-	DALI / 1-10V	TC-TEL	1 x 14/17W	0,90 Kg
901207.84X	D 241, H 2, HE 160	✓	-	TC-TEL	1 x 18W	0,90 Kg
901207.84X.76/.78	D 241, H 2, HE 160	-	DALI / 1-10V	TC-TEL	1 x 18W	0,90 Kg
901208.81X	D 241, H 2, HE 160	✓	-	TC-TEL	1 x 26/32W	0,90 Kg
901208.81X.76/.78	D 241, H 2, HE 160	-	DALI / 1-10V	TC-TEL	1 x 26/32W	0,90 Kg
901209.22X	D 241, H 2, HE 160	✓	-	TC-TEL	1 x 42W	0,90 Kg
901209.22X.76/.78	D 241, H 2, HE 160	-	DALI / 1-10V	TC-TEL	1 x 42W	0,90 Kg
901210.84X	D 241, H 2, HE 160	✓	-	TC-TEL	2 x 18W	0,95 Kg
901211.83X	D 241, H 2, HE 160	✓	-	TC-TEL	2 x 26W	0,95 Kg
901211.83X.76/.78	D 241, H 2, HE 160	-	DALI / 1-10V	TC-TEL	2 x 26W	0,95 Kg
901228.81X	D 241, H 2, HE 210	-	-	TC-TEL	2 x 32W	0,95 Kg
901228.81X.76/.78	D 241, H 2, HE 210	-	DALI / 1-10V	TC-TEL	2 x 32W	0,95 Kg
901212.00X	D 241, H 2, HE 220	-	-	TC-TEL	1 x 14W	1,00 Kg
901212.00X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 14W	1,00 Kg
901213.00X	D 241, H 2, HE 220	-	-	TC-TEL	1 x 17W	1,00 Kg
901213.00X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 17W	1,00 Kg
901214.84X	D 241, H 2, HE 220	✓	-	TC-TEL	1 x 18W	1,00 Kg
901214.84X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 18W	1,00 Kg
901215.83X	D 241, H 2, HE 220	✓	-	TC-TEL	1 x 26W	1,00 Kg
901215.83X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 26W	1,00 Kg
901216.81X	D 241, H 2, HE 220	✓	-	TC-TEL	1 x 32W	1,00 Kg
901216.81X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 32W	1,00 Kg
901217.22X	D 241, H 2, HE 220	✓	-	TC-TEL	1 x 42W	1,00 Kg
901217.22X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	1 x 42W	1,00 Kg
901218.84X	D 241, H 2, HE 220	✓	-	TC-TEL	2 x 18W	1,05 Kg
901219.83X	D 241, H 2, HE 220	✓	-	TC-TEL	2 x 26W	1,05 Kg
901219.83X.76/.78	D 241, H 2, HE 220	-	DALI / 1-10V	TC-TEL	2 x 26W	1,05 Kg
901229.81X	D 241, H 2, HE 270	-	-	TC-TEL	2 x 32W	1,05 Kg
901229.81X.76/.78	D 241, H 2, HE 270	-	DALI / 1-10V	TC-TEL	2 x 32W	1,05 Kg



		IP	
	981753.XXX	Ø 246, H 4	IP54 0,340 Kg
	981754.XXX	Ø 246, H 4	IP20 0,22 Kg
	981755.XXX	Ø 246, H 36	IP20 0,50 Kg
	991756.XXX	Ø 246, H 42	IP54 0,81 Kg
	981757.XXX	Ø 246, H 24	IP54 0,70 Kg
	981758.XXX	Ø 265, H 45	IP20 0,70 Kg

Leuchte ist nicht geeignet zur Abdeckung mit Isoliermaterial!
Luminaire is not suitable for covering with insulating material!

